



Features:

- Constant Voltage PWM Output
- AC Input Range: 200~240VAC with PFC
- Protections: Short Circuit/Over Load/Over Current/Over temperature
- Class I Power Supply
- IP66 Design for indoor installation
- Cooling by Free Air convection
- Compatible with most Leading and Trailing edge dimmers
- Factory fitted flex and AU Plug
- 5 year warranty



Model		PDV-300-12	PDV-300-24	PDV-300-48
Output	DC Voltage (V)	12V	24V	48V
	Voltage Tolerance	±0.5V		
	Voltage Regulation	±5%		
	Rated Current	25A	12.5A	6.25A
	Rated Power	300W		
	Voltage Range	200~240VAC		
Input	Frequency Range	50HZ		
	Power Factor	PF≥0.97/230VAC		
	Efficiency	90%	91%	91%
	AC Current	1.7A	1.64A	1.7A
	Leakage Current	<0.50mA		
	Inrush Current	122A, 47us@50% Ipeak 230VAC	110A, 52us@50% Ipeak 230VAC	122A, 46us@50% Ipeak 230VAC
	Max. No. of drivers on a 16A Circuit Breaker	1 uniT (circuit breaker of type B) / 2 units (circuit breaker of type C) at 230VAC		
Protection	Short Circuit	Hiccup mode, re-power on to recover after fault condition removed		
	Over Load (Note 4)	≤120% Hiccup mode, recovers automatically after fault condition is removed		
	Over Temperature	Shell surface temp. 100°C± 10°C shut down o/p voltage, automatically recovers after the temperature drops		
Environment	Working Temp.	-40 ~ +60°C (refer to de-rating curve)		
	Working humidity	20-95%RH, non-condensing		
	Storage TEMP, humidity	-40~+80°C, 10-95%RH		
	TEMP. coefficient	±0.03%/°C (0-50°C)		
	Vibration	10-500Hz, 5G 12min./1 cycle, period for 72min, each along X, Y, Z axes		
Safety & EMC	Safety standards	EN61347-1 EN61347-2-13		
	Withstand voltage	I/P-O/P: 3.75KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC		
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH		
	EMC emissions (Note 3.)	EN55015, EN61000-3-2-3		
Others	Net. Weight	1.67KG		
	Size	276*78*47mm (L*W*H)		
	Packing	336*121*61mm inner box, 350*310*260mm outside cardon 10PCS/CTN		
Notes	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Tolerance: Includes set up tolerance and load regulation. 3. The power supply is considered as a component that is operated in combination with final equipment. EMC performance could be affected by the complete installation. Original equipment manufacturers may need to conduct additional EMC testing and certification on the final equipment. 4. Loading range from 10% to 100% 5. Specifications are subject to change without prior notice. Contact ADM Systems to confirm any critical parameters.			

Dimming

- Dimming is with installing a leading edge, or trailing edge dimmer across the AC input.
- Compatible with most leading edge and trailing edge dimmers. Australian compatibility table available on request.
- It is recommended that a dimmer, with a power rating three times higher than that of the rated output of the LED driver is used.

Mechanical Specification



- Output cable type: Rubber H05RN-F 2*1.5mm²
- Connect LED to LED driver via the output cable: Red output (V+) positive, Black output (V-) negative.
- Incorrect wiring could result in damage to LED Driver, which is not covered by the warranty.
- Contact your supplier with specific input, or output configuration requests.

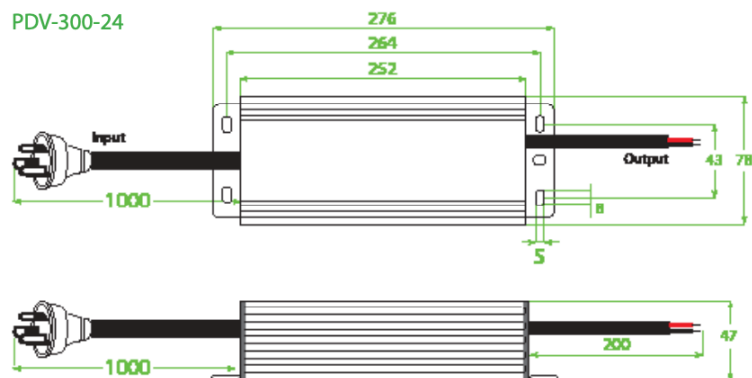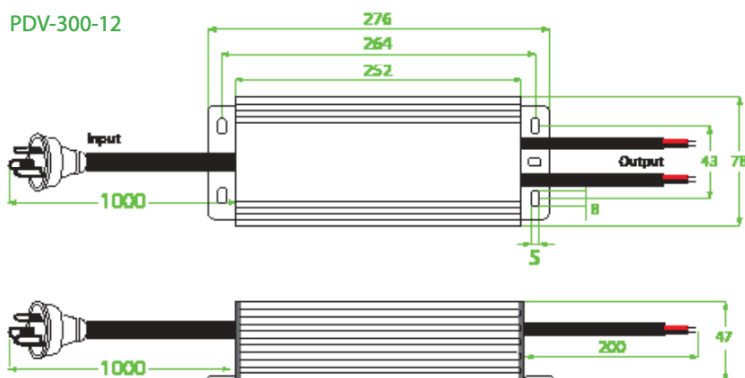


Single Driver Connection Diagram

Multiple Drivers Connection Diagram

Leading/Trailing
Edge Dimmer
(or Lighting System)

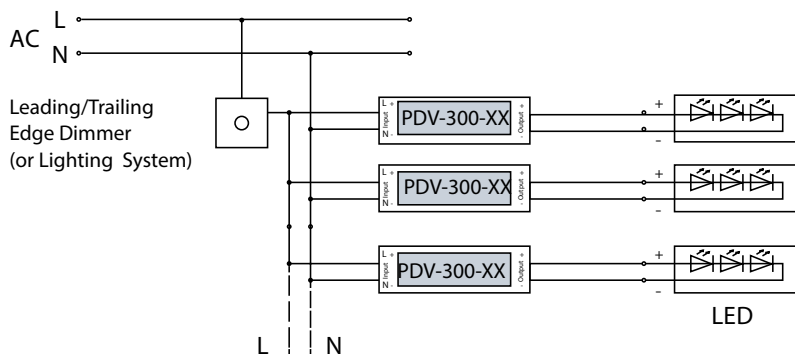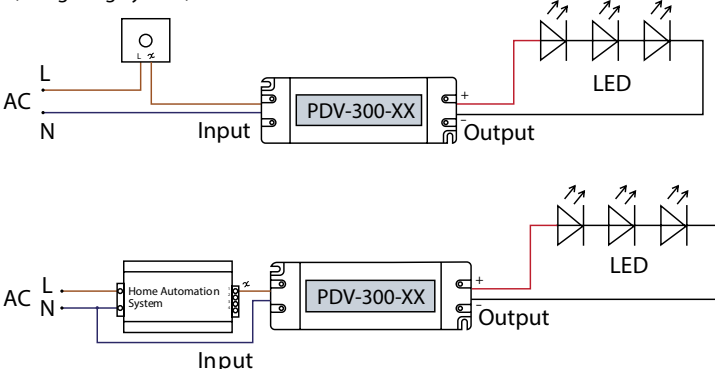

De-rating Curve

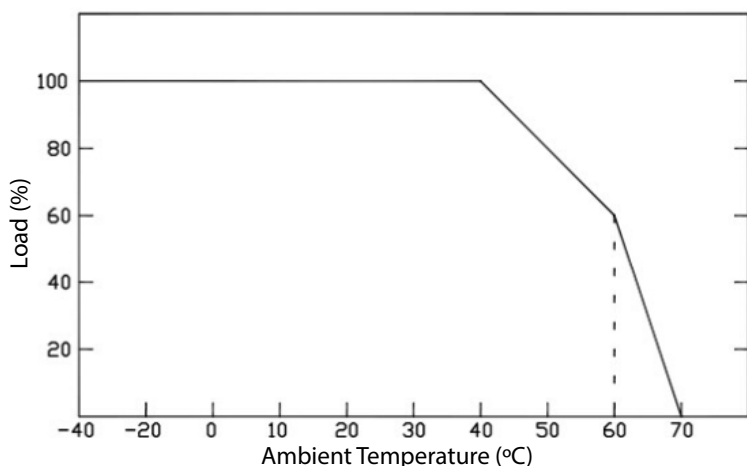

- If being used in higher ambient temperatures, ensure the load on the LED driver is de-rated in accordance with this chart. Failure to do so could lead to a premature failure, which is not covered by the warranty.

- 1) This LED driver should be installed by a qualified electrician.
- 2) Please make sure the LED driver is installed with adequate ventilation around it to allow for heat dissipation.
- 3) Ensure that all wiring is correct before testing in order to avoid damage to the LED driver, or the LEDs.