



Features:

- DALI-2 Compatible
- 100~240VAC wide Input and 100~240VAC Output
- Built-in DALI-2 interface, DALI DT6 device
- 1 DALI address to control 1 channel output, up to 400W
- Input and output with screw terminals
- Trailing edge dimming, supports resistive loads and capacitive loads
- IP20 : Ingress Protection rating
- 2 year warranty




Model		SR-2303SAC-HP
Product Data	Input Voltage	100-240VAC
	Output Voltage	100-240VAC
	Max. Current Load	1.8A Max
	DALI Consumption	2mA
	Size	45.5*45*20.3mm (L*W*H)
Safety & Warnings	<ul style="list-style-type: none"> • DO NOT Install with power applied to the device • DO NOT expose the device to moisture 	
Notes	<ul style="list-style-type: none"> • In compliance with IEC 62386-101:2014, IEC 62386-102:2014, IEC 62386-207Ed2 • Built-in DALI-2 interface, DALI DT6 device • Match all DALI systems in the market • AC phase cut dimmer with both DALI and push switch control interface • 100-240VAC wide input and output voltage, • 1 DALI address to control 1 channel output, up to 400W • Input and output with screw terminals, safe and reliable 	<ul style="list-style-type: none"> • Trailing edge dimming, supports resistive loads and capacitive loads • Innovative minimum brightness setting function • Single wire push switch input for push dim function • Great compatibility with universal 8V-230V~ input push switches • To dim and switch single color dimmable LED lamps, traditional incandescent and halogen lights • Mini size, easy to be installed into a standard size wall box • Waterproof grade: IP20

Compatible Load Types


Load Symbol	Load Type	Maximum Load	Remarks
	Dimmable LED Lamps	200W @240V 100W @ 120V	Due to variety of LED lamp designs, maximum number of LED lamps is further dependent on power factor result when connected to dimmer.
	Dimmable LED Drivers	200W @240V 100W @ 120V	Maximum permitted number of drivers is 200W divided by driver nameplate power rating.
	Incandescent Lighting, Halogen 240V Lamps	400W @240V 200W @ 120V	
	Low voltage halogen lighting with electronic transformers	200W @240V 100W @ 120V	

Mechanical Specification

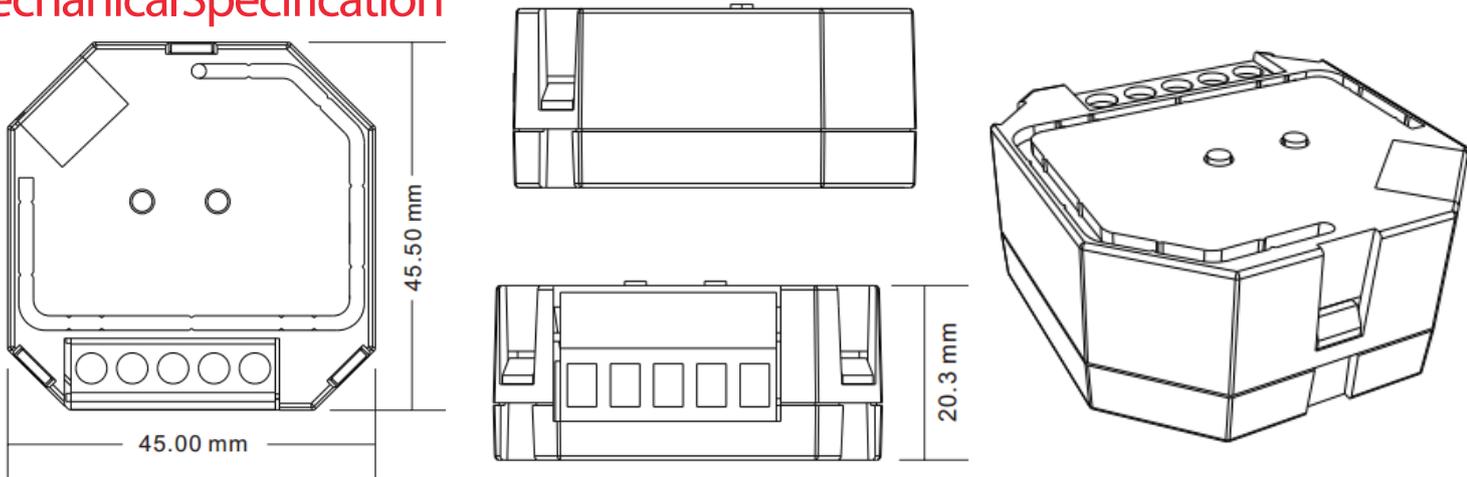


Wiring Diagram


1. With DALI bus

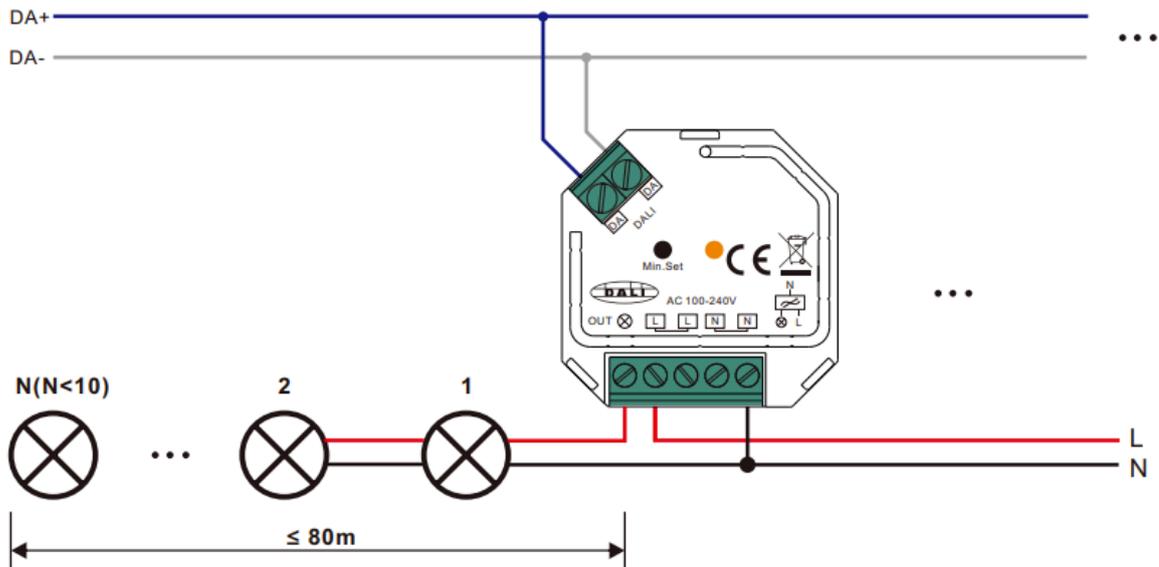

2. With AC Push

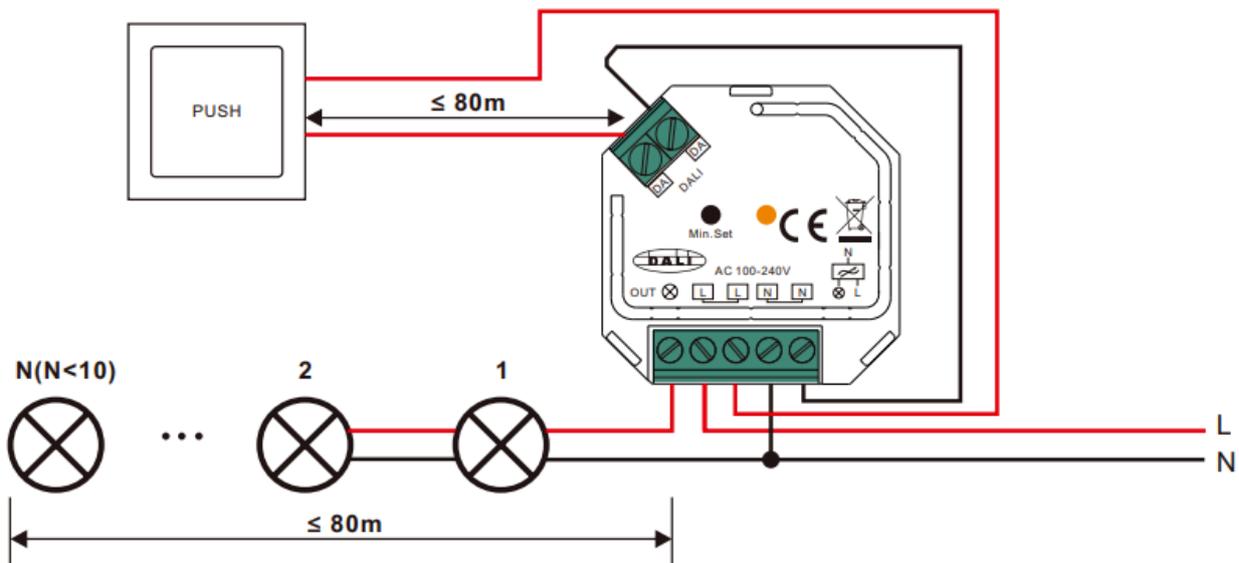

3. With Single AC Push Switch

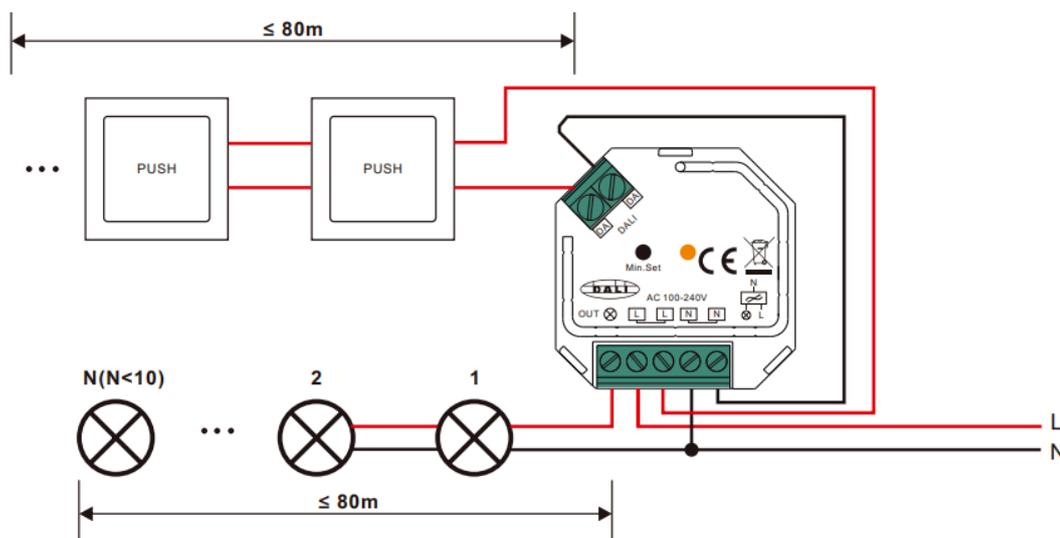

Note

- 1) The maximum allowed number of parallel connected drivers or luminaires shall be less than 10, otherwise the dimmer may be damaged due to the high inrush current at the moment of starting.
- 2) The maximum allowed cable length from the dimmer to connected drivers or luminaires shall not be longer than 80 meters.
- 3) The maximum allowed cable length from the push switches to the dimmer shall not be longer than 80 meters.

This phase dimmer adopts trailing edge dimming (reverse phase control), please make sure the connected loads support reverse phase control. Please refer to the user manual of the load or consult the supplier of the load.

Operation

Setting DALI Address:

1 DALI addresses for 1 channel output is assigned by DALI Master controller automatically, please refer to user manuals of compatible DALI Masters for specific operations.

Setting minimum brightness:

Adjust brightness to a level, then press and hold down "Min. Set" key on the dimmer until the light flashes, once set a minimum brightness, the light can only be dimmable between this minimum brightness and maximum brightness.

The dimming range of this dimmer is 1%-100%, but some load types may flicker when dimmed to 1%, thus a minimum brightness shall be set higher than 1% to avoid flickering during dimming process.

Delete the minimum brightness:

Adjust the brightness to maximum level, then click "Min. Set" key on the dimmer to delete the minimum brightness, the light will flash to indicate successful reset.

PUSH DIM:

While connected with PUSH switch, click the button to switch ON/OFF lights. Press and hold down the button to increase/decrease light intensity.