


Features:

- AC Input Range: 200~240VAC
- Constant Voltage with PWM Output
- Protections: Short Circuit, Over Load, Over Temperature
- Class I Power Supply
- IP66 design for outdoor installation
- Factory fitted flex and AU Plug
- DALI-2 Protocol


Model		DDV-150-24
Output	DC Voltage (V)	24V (PWM Frequency 4kHz)
	Voltage Tolerance	±0.5V (see Note 2.)
	Rated Current	6.25A
	Rated Power	150W
Input	Voltage range	200-240VAC
	Frequency range	47~63HZ
	Power Factor	PF≥ 0.97/230VAC Full loading
	Full load efficiency (Typ.)	88.2%
	AC current (Max.)	1.2A
	Leakage Current	<0.50mA
	Inrush Current (Typ.)	56A (Twidth 640us measured at 50% I peak, COLD START, 230VAC)
Protection	MAX. No. of drivers on 16A Circuit breaker	4 units (circuit breaker of type B) / 7 units (circuit breaker of type C) at 230VAC
	Short circuit	Constant current mode, re-power on to recover after fault condition is removed
	Over loading (Note 4.)	≤120% constant current limiting, auto-recovery after fault condition is removed
Environment	Over temperature	≤100°C± 10°C
	Working TEMP.	-40 ~ +60°C (refer to de-rating curve)
	Working humidity	20-95%RH, non-condensing
	Storage TEMP., humidity	-40~+80°C,10-95%RH
	TEMP. coefficient	±0.03%/°C (0-50°C)
Safety & EMC	Vibration	10-500Hz, 5G 10min./1 cycle, period for 60min, each along X, Y, Z axes
	Safety standards	AS 61347.2.13:2018 EN62493 IP66
	Withstand voltage	I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC
	Isolation resistance	I/P-O/P I/P-FG O/P-FG:100MΩ/500VDC/25°C/70%RH
	EMC emissions (Note 3.)	EN55015, CISPR 15:2017
Others	EMC immunity	EN61000-4-2,3,4,5,6 ,11, EN61547
	Net. weight	1.6KG
	Size	240*70*43mm (L*W*H)
Notes	Packing	390*320*190mm outside carton 10PCS /CTN
	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.	
	2. Tolerance: Includes set up tolerance, line regulation and load regulation.	
	3. The LED driver is considered as a component that is operated in conjunction with final equipment. EMC performance could be affected by the complete installation. Original equipment manufacturers may need to conduct additional EMC testing and certification on the final equipment.	
	4. Loading range from 10% to 100%.	
	5. Specifications are subject to change without prior notice. Contact your supplier to confirm any critical parameters.	

Mechanical Specifications


- Input: 1m AU Flex and Plug.
- Output: Rubber Cable 2\*1.00mm<sup>2</sup> Red: (V+) Positive, Black: (V-) Negative.
- Dimming: Rubber Cable 2\*0.75mm<sup>2</sup> Blue: DA, White DA (Non-Polarised)

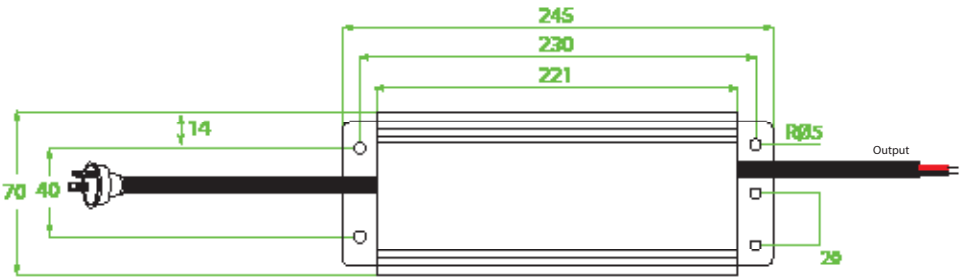


## Single Driver Connection Diagram

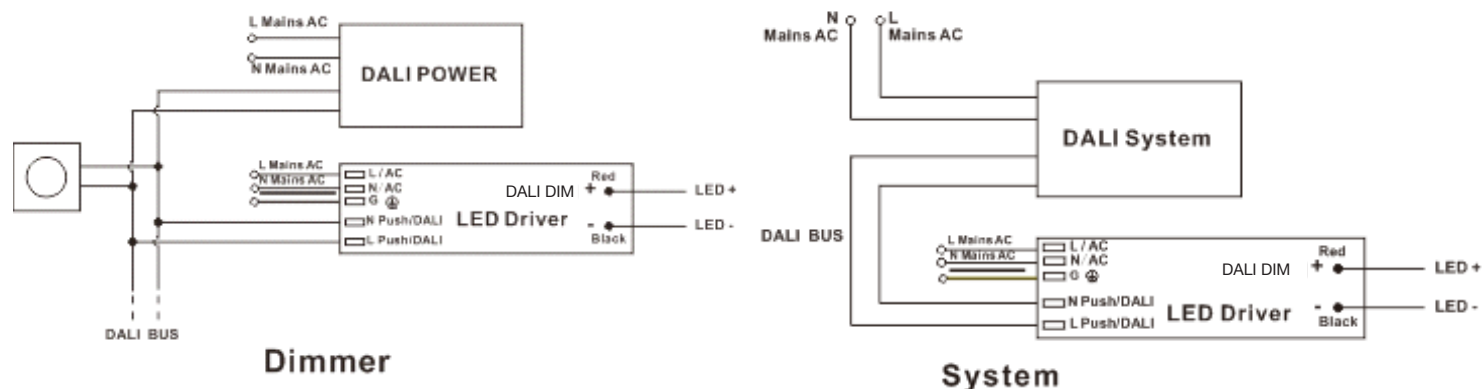

## Multiple Drivers Connection Diagram

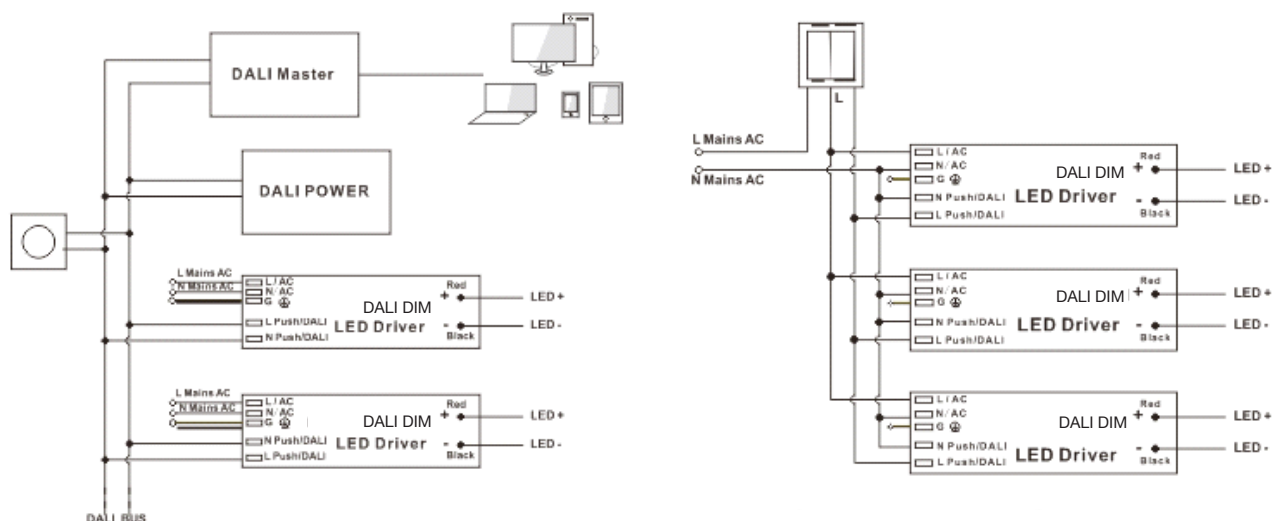

## De-rating Curve

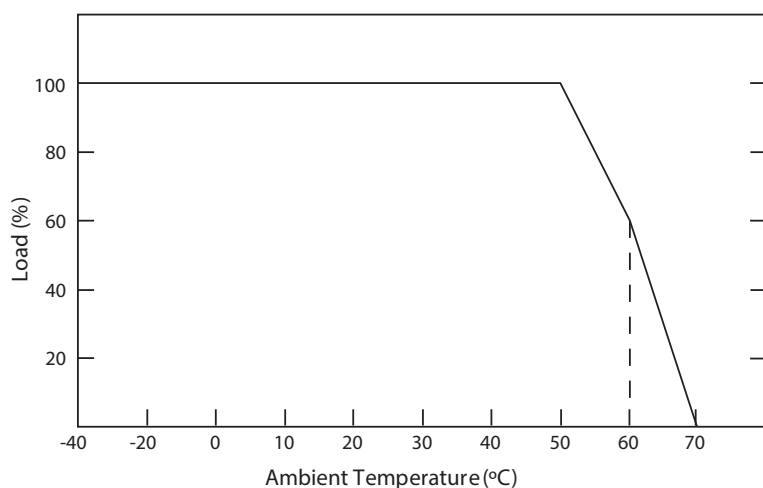

- If being used in higher ambient temperatures, ensure the load on the LED driver is de-rated in accordance with this chart. Failure to do so could lead to a failure, which is not covered by the warranty

- Refer to Power Source Installation Manual.
- Do Not Cover.
- This LED driver should be installed by a qualified electrician.
- Please make sure the LED driver is installed with adequate ventilation around it to allow for heat dissipation.
- Ensure that all wiring is correct before testing in order to avoid damage to the LED driver, or the LEDs.