


PHILIPS

Xitanium

LED driver

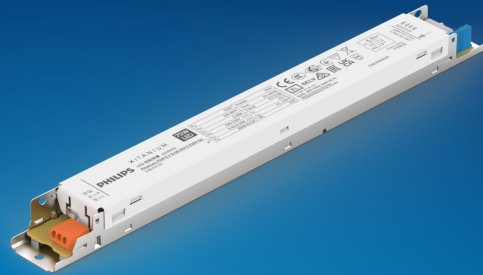

Preliminary Datasheet

Xitanium isolated Fixed Output (SimpleSet)

Xitanium 75W 0.7-2.0A 54V S 230V G2

9290 038 72606

Xitanium isolated Fixed Output drivers are ideal for Low Voltage (LV) linear systems.

They offer ease of design-in and make the approbation process easier. The Xitanium range is built on three pillars: quality of light, reliability and flexibility. By using Xitanium LED drivers in your luminaires, you can be sure to offer your customers high quality of light without visual flicker and stroboscopic effects. The reliability of your complete lighting system is enhanced as our drivers offer specific features that protect the connected LED module, including reduced ripple current and thermal de-rating. Finally, application-oriented operating windows offer the flexibility required to provide the stable lumen output and light quality levels that lighting specifiers and architects demand.

Features

- High efficiency
- Wide operating windows - output current can be adjusted via SimpleSet
- Reduced ripple current for increased reliability
- SELV
- Suitable for Class I and Class II luminaires

Benefits

- High quality of light
- High reliability
- Future-proof flexibility

Application

- Offices
- Retail: supermarkets, shopping malls

Logistical data

Specification item	Value
Product name	Xitanium 75W 0.7-2.0A 54V S 230V G2
EOC	872016938507800
Logistic code 12NC	9290 038 72606
EAN1 (GTIN)	8720169385078
EAN3 (box)	8720169385085
Pieces per box	24
Weight	212 gram

Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage range	220...240	V _{ac}	Performance range
Rated input voltage	230	V _{ac}	
Rated input frequency	50...60	Hz	Performance range
Rated input current	0.38	A	@ Maximum output power @ rated input voltage
Rated input power	85.0	W	@ Maximum output power @ rated input voltage
Power factor performance range	≥ 0.9 C		@ Maximum output power @ rated input voltage
Total harmonic distortion	20	%	@ Maximum output power @ rated input voltage
Efficiency	89.0	%	@ Maximum output power @ rated input voltage @ max. U _{out}
Rated input voltage DC	186...250	V _{dc}	Performance range. EOFi=0.95
Rated input current DC	0.34...0.46	A _{dc}	Performance range
Input voltage AC	198...264	V _{ac}	Operational range.
Input frequency AC	45...66	Hz	Operational range
Input voltage DC	168...275	V _{dc}	Operational range
Isolation input to output	SELV		

Electrical output data


Specification item	Value	Unit	Condition
Regulation method	Constant Current		
Output voltage	24...54	V _{dc}	
Output voltage max.	60	V	Maximum output voltage (rms)
Output current	700...2000	mA	
Output current tolerance ±	5	%	@full load
Output current ripple LF	≤ 4	%	Ripple = peak / average, < 3kHz
Output current ripple HF	≤ 4	%	
Output P _{st} ^{LM}	≤ 0.8		
Output SVM	≤ 0.3		
Output power	21.0...75.0	W	

Control interfaces

Specification item	Value	Unit	Condition
Control method	Fixed		AOC configurable via SimpleSet. See design-in guide for more details.

Wiring and Connections

Specification item	Value	Unit	Type
Input wire cross-section	0.5...1.5 / 20...16	mm² / AWG	WAGO744, solid wire
Input wire strip length	8...9	mm	
Output wire cross-section	0.5...1.5 / 20...16	mm² / AWG	WAGO744, solid wire
Output wire strip length	8...9	mm	
Maximum cable length	2	m	Total length of wiring including LED module, one way. For longer wiring please double check EMI behavior of luminaire

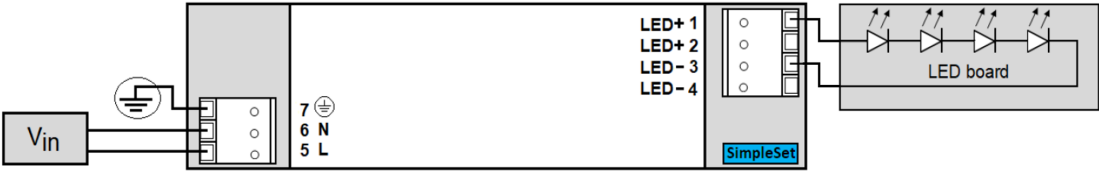


Isolation

Insulation per IEC61347-1	Input	Output	Housing
Input	-	SELV	Basic
Output	SELV	-	Basic
Housing	Basic	Basic	-

Dimensions and weight

Specification item	Value	Unit	Tolerance (mm)
Length (A1)	280	mm	
Mounting hole distance (A2)	270	mm	
Height (C1)	21	mm	
Mounting hole diameter (D1)	4.1	mm	
Weight	212	gram	

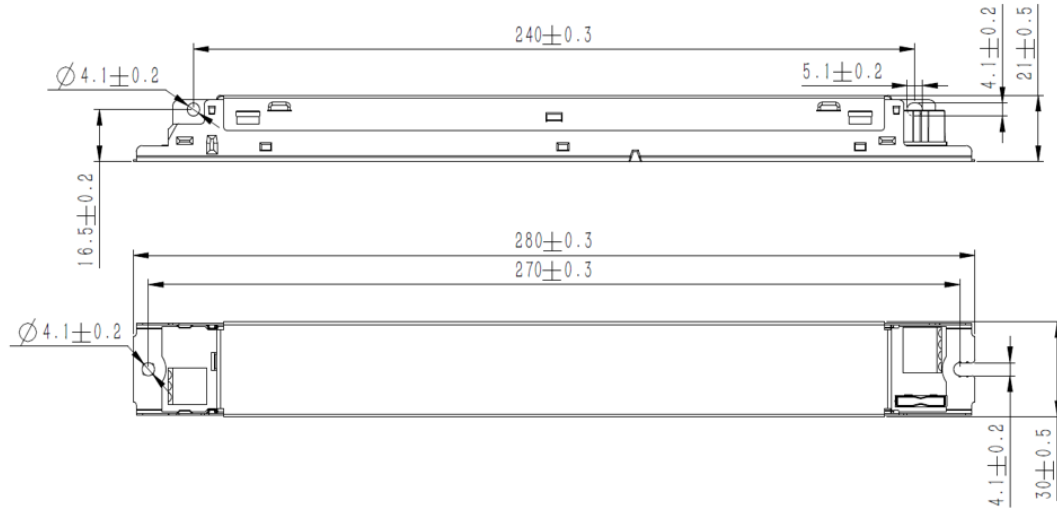


Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...+50	°C	Higher ambient temperature allowed as long as Tcase-max is not exceeded
Tcase-max	75	°C	Maximum temperature measured at T _{case} -point
Tcase-life	65	°C	Measured at T _{case} -point
Maximum housing temperature	110	°C	In case of a failure, inherent by design
Relative humidity	10...90	%	Non-condensing

Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	100,000	hours	Measured temperature at Tcase-point is Tcase-life. Maximum failures = 10%
Mains switching cycles	> 100,000	switches	See Design-in guide for detailed explanation

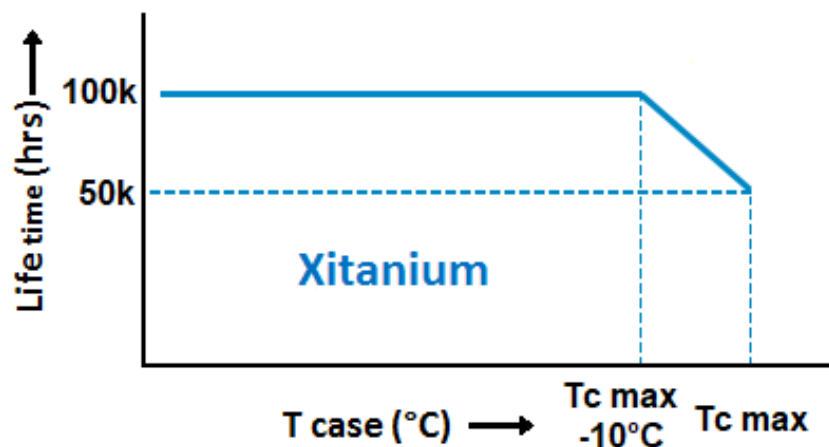

Maximum failures = 10%

Temperature [°C]	Lifetime	Unit	Condition
75	50000	hr	
70	71000	hr	
65	100000	hr	Temperature measured @Tc point
60	>100000	hr	
55	>100000	hr	

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...+85	°C	
Relative humidity	5...95	%	Non-condensing

Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	SimpleSet	700 mA	
Adjustable Light Output (ALO)	Yes	OFF	
Adjustable Light Output (ALO) min level	Yes	OFF	
Corridor Mode	No		
DC emergency (DCemDim)	No		
OEM Write Protection (OWP)	Yes	OFF	

Non-programmable features


Specification item	Value		Condition
Open load protection	Yes		Automatic recovering
Short circuit protection	Yes		Automatic recovering
Over power protection	Yes		Automatic recovering
Hot wiring	No		
Suitable for fixtures with protection class	I and II		per IEC60598
Energy metering (DALI part 252)	No		
Diagnostics via Signify tool	No		

Inrush current

Specification item	Value	Unit	Condition
Inrush current	32.3	A	Input voltage 230V
Inrush peak width	218	μs	Input voltage 230 V, measured at 50% height
Drivers / MCB 16A type B @230V AC	≤ 18	pcs	Input voltage 230V

Please refer to the driver design in guide if you use other MCB-types.

If several mini circuit breakers are used directly side-by-side (without distance pieces)
a correction factor of 80% has to be applied to the rated current

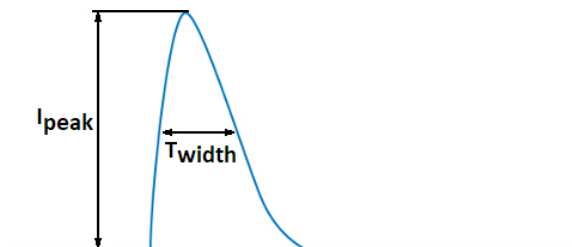

Driver touch current / protective conductor current / earth leakage current

Specification item	Value	Unit	Condition
Typical Protective Conductor Current (ins. Class I)	0.4	mA rms	Acc. IEC60598-1. LED module contribution not included

Surge immunity


Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	1	kV	Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Mains surge immunity (comm. mode)	2	kV	Acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us

Application Info (Approbation)

Specification item	Value
Approval marks and Certifications	CCC / CE / EAC / EL / ENEC / RCM / SELV / TISI / UA / UKCA
Ingress Protection classification (IP)	20
Application	Indoor Linear
Mounting Type	Built-in


Graphs

Operating window

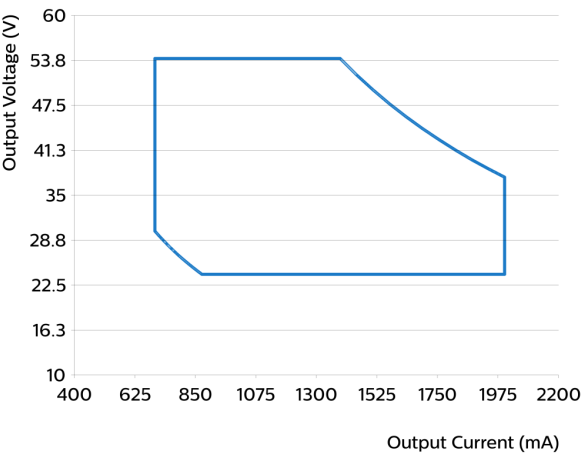


Type	Output current (mA)	Min. output voltage (V)	Max. output voltage (V)	Max. output power (W)
Xitanium 75W 0.7-2.0A 54V S 230V G2	700	30	54	37.8
Xitanium 75W 0.7-2.0A 54V S 230V G2	750	28	54	40.5
Xitanium 75W 0.7-2.0A 54V S 230V G2	800	26	54	43.2
Xitanium 75W 0.7-2.0A 54V S 230V G2	850	24	54	45.9
Xitanium 75W 0.7-2.0A 54V S 230V G2	900	24	54	48.6
Xitanium 75W 0.7-2.0A 54V S 230V G2	950	24	54	51.3
Xitanium 75W 0.7-2.0A 54V S 230V G2	1000	24	54	54
Xitanium 75W 0.7-2.0A 54V S 230V G2	1050	24	54	56.7
Xitanium 75W 0.7-2.0A 54V S 230V G2	1100	24	54	59.4
Xitanium 75W 0.7-2.0A 54V S 230V G2	1150	24	54	62.1
Xitanium 75W 0.7-2.0A 54V S 230V G2	1200	24	54	64.8
Xitanium 75W 0.7-2.0A 54V S 230V G2	1250	24	54	67.5
Xitanium 75W 0.7-2.0A 54V S 230V G2	1300	24	54	70.2
Xitanium 75W 0.7-2.0A 54V S 230V G2	1350	24	54	72.9
Xitanium 75W 0.7-2.0A 54V S 230V G2	1400	24	53	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1450	24	51	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1500	24	50	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1550	24	48	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1600	24	46	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1650	24	45	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1700	24	44	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1750	24	42	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1800	24	41	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1850	24	40	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1900	24	39	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1950	24	38	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	2000	24	37	75


Power factor versus output power

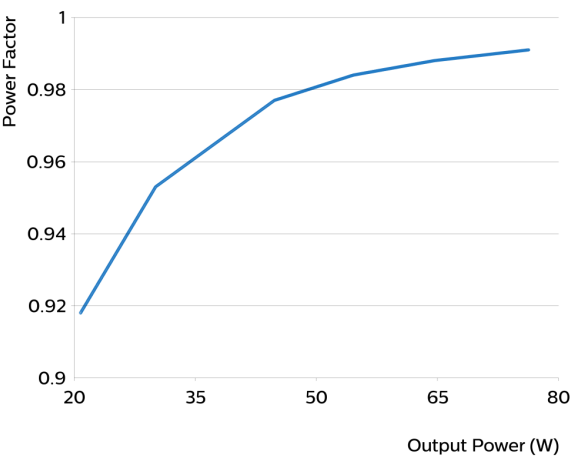

Efficiency versus output power

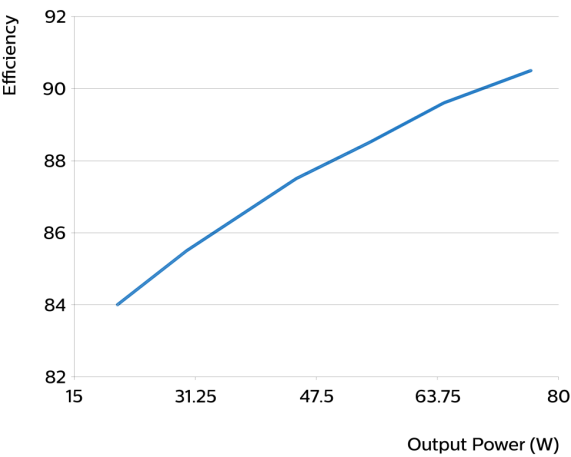

THD versus output power

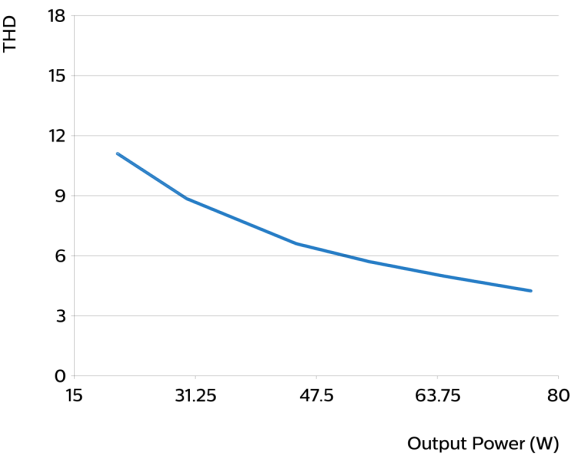

The information in this datasheet is accurate at the time of writing. All data and specification is subject to change.

This datasheet is provided "as is" without express or implied warranty of any kind, it is based on the data of this new product.

Neither Signify nor its agents assume any liability for inaccuracies in this guide or losses incurred by use or misuse of the information in this guide.

Signify will not be liable for any indirect, special, incidental or consequential damages (including damages for loss of business, loss of profits or the like), whether based on breach of contract, tort (including negligence), product liability or otherwise, even if Signify or its representatives have been advised of the possibility of such damages.

Signify desires to provide, and the customer identified below ("Customer") desires to receive, limited prototypes of this product listed in this document ("Products") at no charge and free-of-cost. In consideration of receiving the Products at no charge and free-of-cost, Customer agrees to assume, and does assume, all risk and liability for the use of the Products and its employees' and agents' use of the Products, and that Signify shall have no liability to Customer with respect to Customer's use, or the performance of, of the Products.

We like you to contact Signify and report problems, suggestions towards a prototype of this product, and provide suggestions regarding this New Product. Signify has no obligation whatsoever to respond in any way to such a problem report or suggestion but will evaluate to any feedback as possible improvement.

The customer shall not sell or otherwise provide a Prototype to any third party.



©2024 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.
UK importer address: Signify Commercial UK Limited, 3, Guildford Business Park, GU2 8XG.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Date of release: September 12, 2024 v7

www.philips.com/oem